


# Ex d Head Flameproof



Max 40 V 3 Watt Rating  
 Suitable for use with thermocouple /RTD Sensors  
 Terminal Blocks or Transmitters  
 Accepts 33mm and 40mm Centre Terminal Blocks

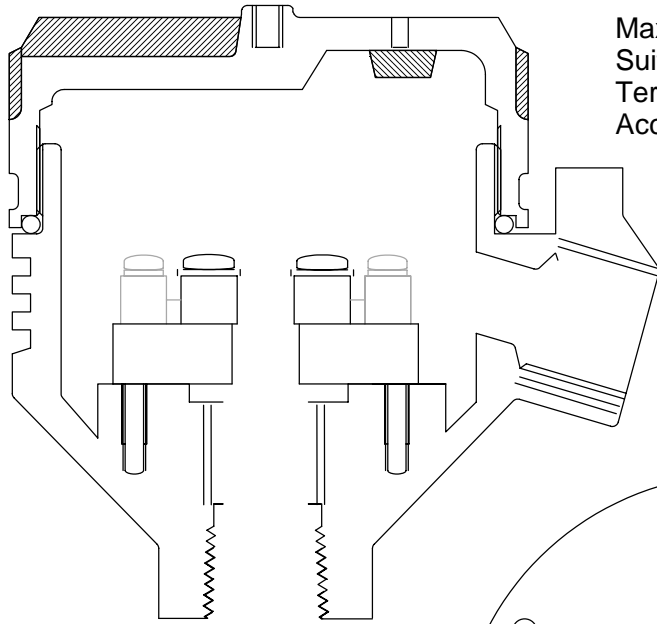

M20 x 1.5mm  
Cable Entry


PROCESS ENTRY  
1/2" NPT

**Ex d**

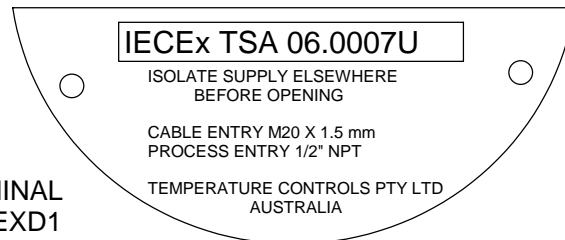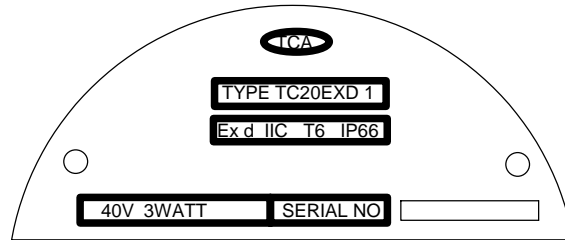

LABELLING FOR Ex d TERMINAL  
 ENCLOSURE MODEL TC20EXD1  
 USED AS A COMPONENT



# Ex e Head Increased Safety

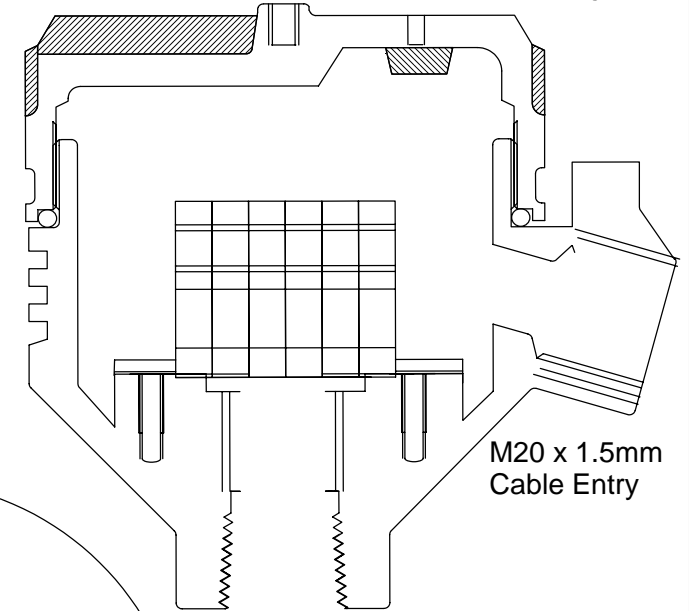

M20 x 1.5mm  
Cable Entry

PROCESS ENTRY  
1/2" NPT

**Ex e**

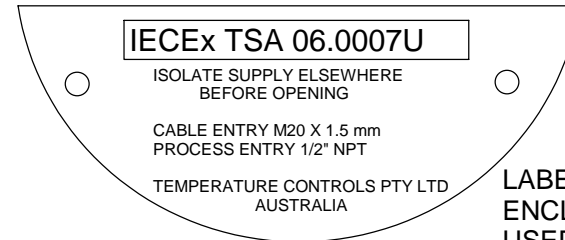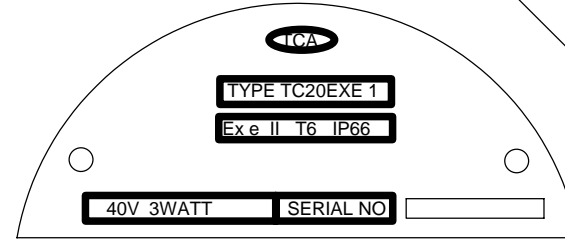

LABELLING FOR Ex e TERMINAL  
 ENCLOSURE MODEL TC20EXE1  
 USED AS A COMPONENT

IECEX Certificate No. IECEX TSA 06.0007U

IECEX certified Ex d IIC T6 IP66  
 IECEX certified Ex e IIC T6 IP66

## TEMPERATURE CONTROLS PTY LTD

### CONDITIONS

THIS DRAWING IS OUR  
 EXCLUSIVE PROPERTY  
 AND MUST NOT BE  
 COPIED OR HANDED  
 TO ANY OTHER PARTIES  
 WITH OUT WRITTEN  
 PERMISSION. IT SHALL  
 BE RETURNED UPON  
 REQUEST

SYDNEY : 7 YAMMA ST SEFTON , NSW 2162  
 PHONE : (02) 9721 8644 FAX : (02) 9738 9339  
 MELBOURNE : 8/280 Whitehall St  
 YARRAVILLE VIC 3013  
 PHONE : (03) 9687 0000 FAX : (03) 9687 1900  
 EMAIL : sales@temperature.com.au



Quality  
 Endorsed  
 Company

Certificate No: QEC 14412  
 AS/NZS 9001:2000

TITLE

**IECEX TERMINAL HEADS**

SIZE : A4	DATE : 03/01/07	DWG NO : SD 558
SCALE : NTS	DRAWING BY K.F	REV : 01