


Ex de Flame Proof / Ex tD Dust Certified Temperature Assembly Spring Loaded Nipple Connection MODEL No: TC20SPRTA

MATERIAL: ALUMINIUM ALLOY
DEGREE OF PROTECTION : IP66

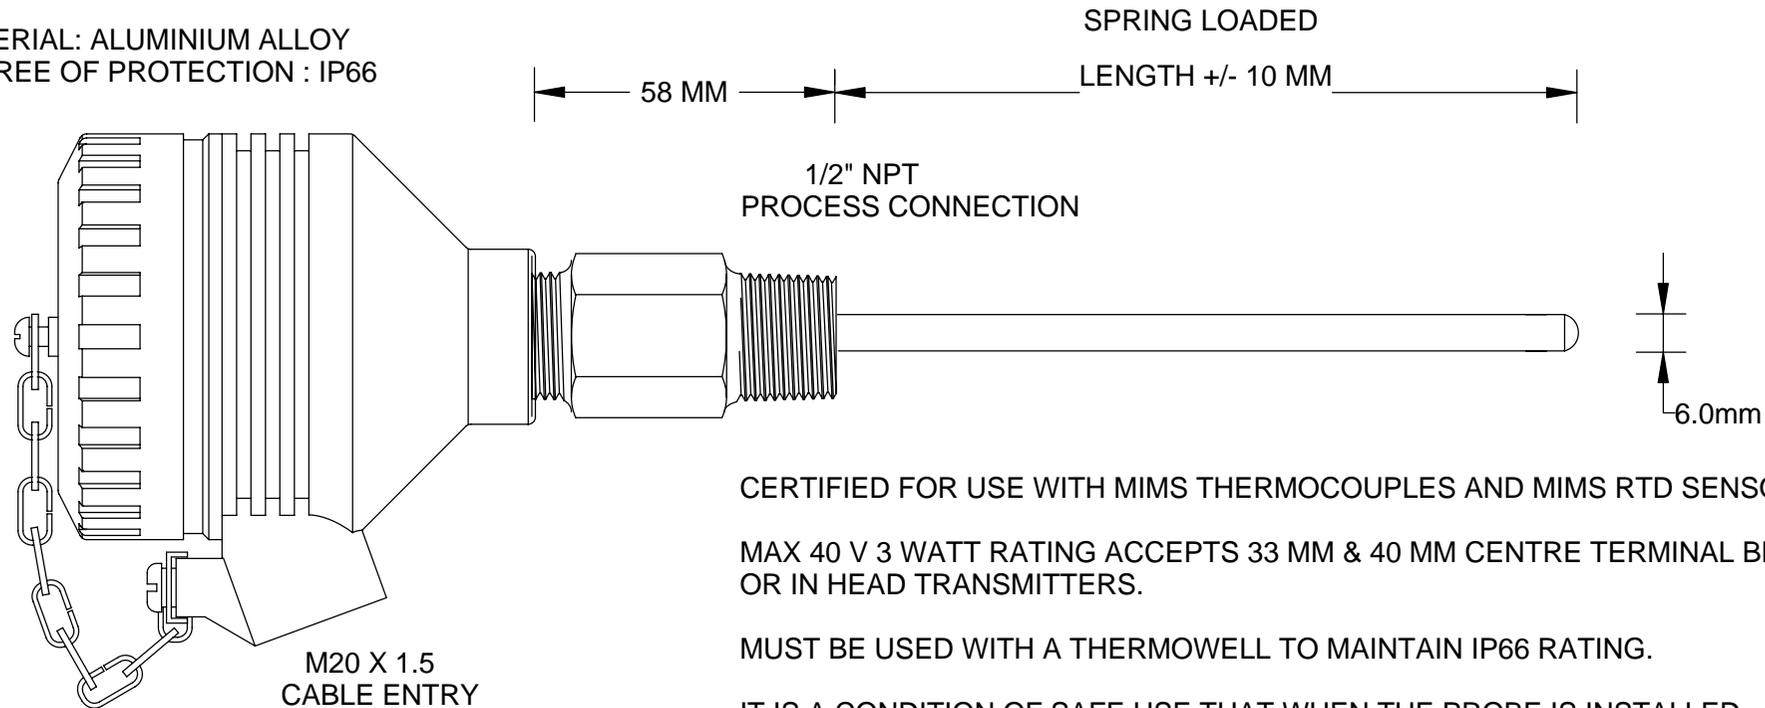

CERTIFIED FOR USE WITH MIMS THERMOCOUPLES AND MIMS RTD SENSORS

MAX 40 V 3 WATT RATING ACCEPTS 33 MM & 40 MM CENTRE TERMINAL BLOCKS OR IN HEAD TRANSMITTERS.

MUST BE USED WITH A THERMOWELL TO MAINTAIN IP66 RATING.

IT IS A CONDITION OF SAFE USE THAT WHEN THE PROBE IS INSTALLED IN A MEDIA WITH TEMPERATURE EXCEEDING +80°C, A LAGGING EXTENSION MUST BE USED TO MAINTAIN TEMPERATURE CLASS OF T6 ON THE TERMINAL HEAD (IN AN AMBIENT TEMPERATURE OF UP TO +60°C)

IECEx certified Ex de, IIC T6 IP66 or Ex tD A21 T6 IP66

IECEx Certificate of Conformance No : IECEx TSA 09.0045X
ISSUE 0 for complete assembly

TEMPERATURE CONTROLS PTY LTD

QUALITY ENDORSED COMPANY
Certificate No: QEC 14412
AS/NZS 9001:2008

CONDITIONS

THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST

SYDNEY: 7 YAMMA ST SEFTON , NSW 2162
PHONE: (02) 9721 8644 FAX : (02) 9738 9339
MELBOURNE: 8/280 Whitehall St YARRAVILLE, VIC 3013
PHONE: (03) 9687 0000 FAX : (03) 9687 1900
BRISBANE: 28A/125 Kerry Road, Archerfield Qld 4108
PHONE: (07) 3373 8424 FAX: (07) 3373 8067
EMAIL: sales@temperature.com.au

TITLE **Ex de / Ex tD ASSEMBLY
ALUMINIUM ENCLOSURE**

SIZE : A4	DATE : 01/07/15	DWG NO : SD572
SCALE : NTS	DRAWING BY R.B	REV : 06