



OPTIONAL LOOP POWERED
IP65 PLUG ON LED DISPLAY

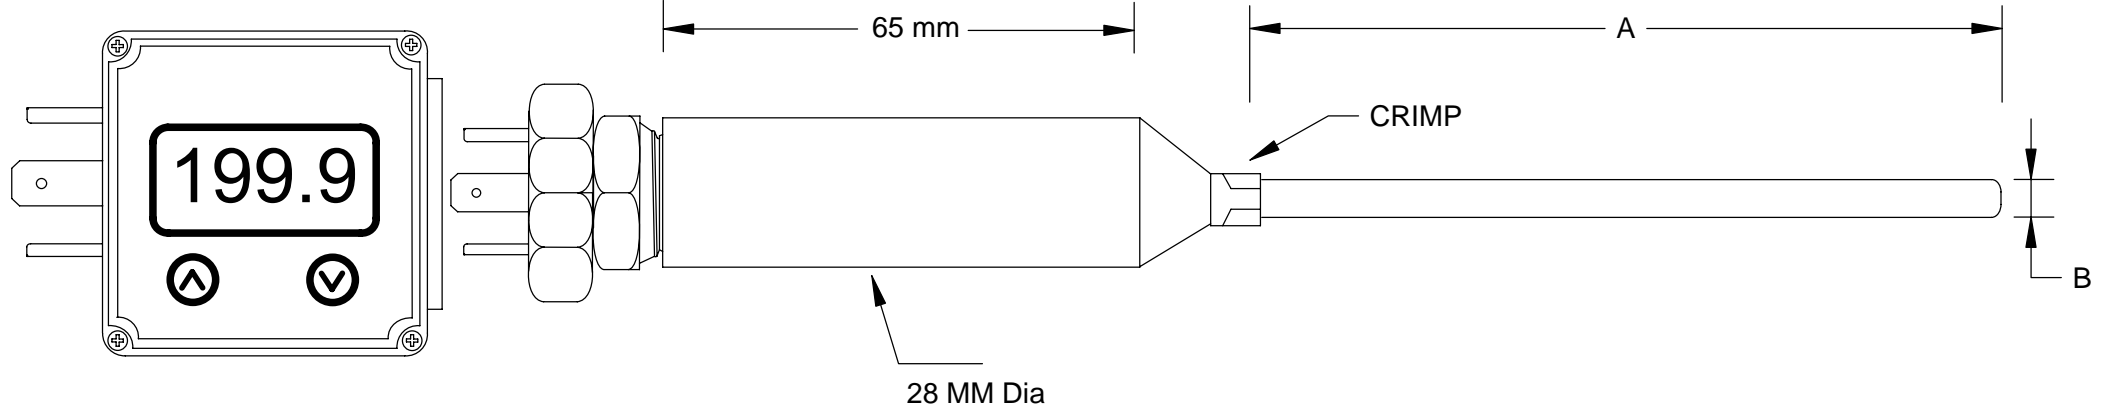

MATCHING PLUG



- 1 +
·
2 : PIN CONNECTION
DETAILS 4 - 20 mA OUTPUT

- TYPE K THERMOCOUPLE
- TYPE N THERMOCOUPLE
- TYPE J THERMOCOUPLE
- TYPE T THERMOCOUPLE
- RTD PT100

DIN 43650 3 PIN AND EARTH
IP65 PLUG IN CONNECTOR
C/W STAINLESS STEEL BODY
INBUILT 4 - 20 mA TRANSMITTER
PROGRAMMABLE BY HART
PROTOCOL MODEM

TEMPERATURE CONTROLS PTY LTD Certificate No: QEC 14412
ISO 9001:2000

CONDITIONS

THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST

SYDNEY : 7 YAMMA ST SEFTON , NSW 2162
PHONE : (02) 9721 8644 FAX : (02) 9738 9339
MELBOURNE : 8 / 280 WHITEHALL ST
YARRAVILLE VIC 3013
PHONE : (03) 9687 0000 FAX : (03) 9687 1900
EMAIL : sales@temperature.com.au



TITLE

SIZE : A4	DATE :18/08/08	DWG NO : SD 688
SCALE : NTS	DRAWING BY R.M	REV : 00