


PIPE TEMPERATURE MEASUREMENT

WELD FLUSH MOUNTED TANK SOCKET TO PIPE
(FOR MINIMUM IMMERSION)

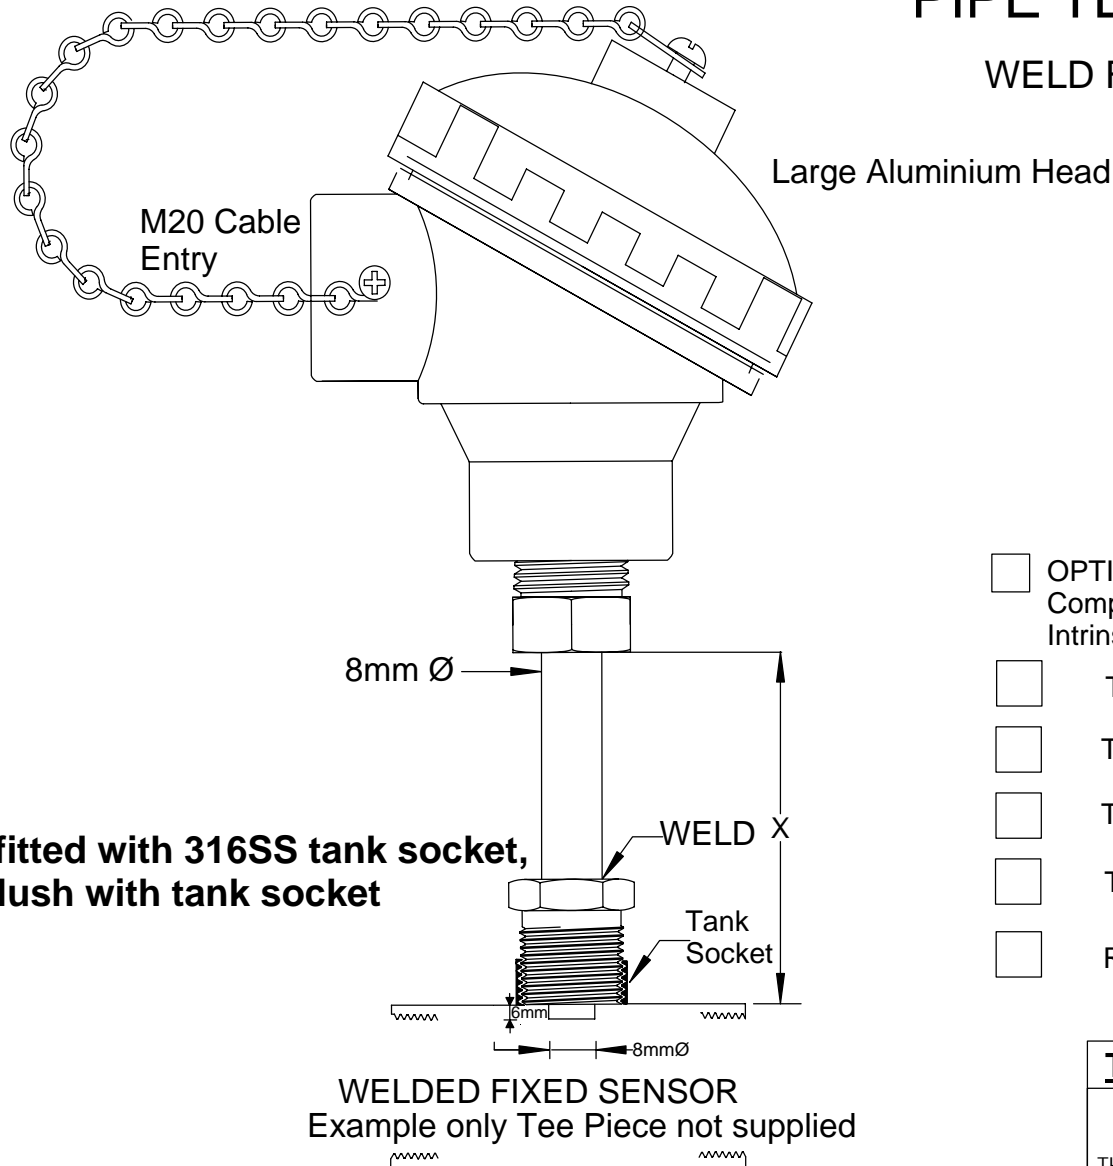

Supply fitted with 316SS tank socket,
thread flush with tank socket

WELDED FIXED SENSOR
Example only Tee Piece not supplied

STAINLESS STEEL FITTING SIZE

- 1/4" BSP 1/4" NPT
OR
 1/2" BSP 1/2" NPT

DIRECT MOUNT
PIPE TEMPERATURE MEASUREMENT
LARGE ALUMINIUM
TERMINAL HEAD IP65

- OPTION - Ex ia
 Compliance with ANSI AS/NZS 60079. 11.2006 Explosive Atmospheres,
 Intrinsic safety Ex ia (1047 RTD & TC)
- TYPE K THERMOCOUPLE
 TYPE N THERMOCOUPLE
 TYPE J THERMOCOUPLE
 TYPE T THERMOCOUPLE
 RTD PT100

TEMPERATURE CONTROLS PTY LTD Certificate No: QEC 14412
ISO 9001

CONDITIONS

THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST

SYDNEY : 7 YAMMA ST SEFTON , NSW 2162
 PHONE : (02) 9721 8644 FAX : (02) 9738 9339
 MELBOURNE : 8/280 Whitehall St
 YARRAVILLE VIC 3013
 PHONE : (03) 9687 0000 FAX : (03) 9687 1900
 EMAIL : sales@temperature.com.au



TITLE

SIZE : A4	DATE : 05/08/11	DWG NO : SD 693
SCALE : NTS	DRAWING BY R.B	REV : 05