


# Ex de / Ex tD Element Spring Loaded Nipple Connection With 316 Stainless Steel Terminal Head

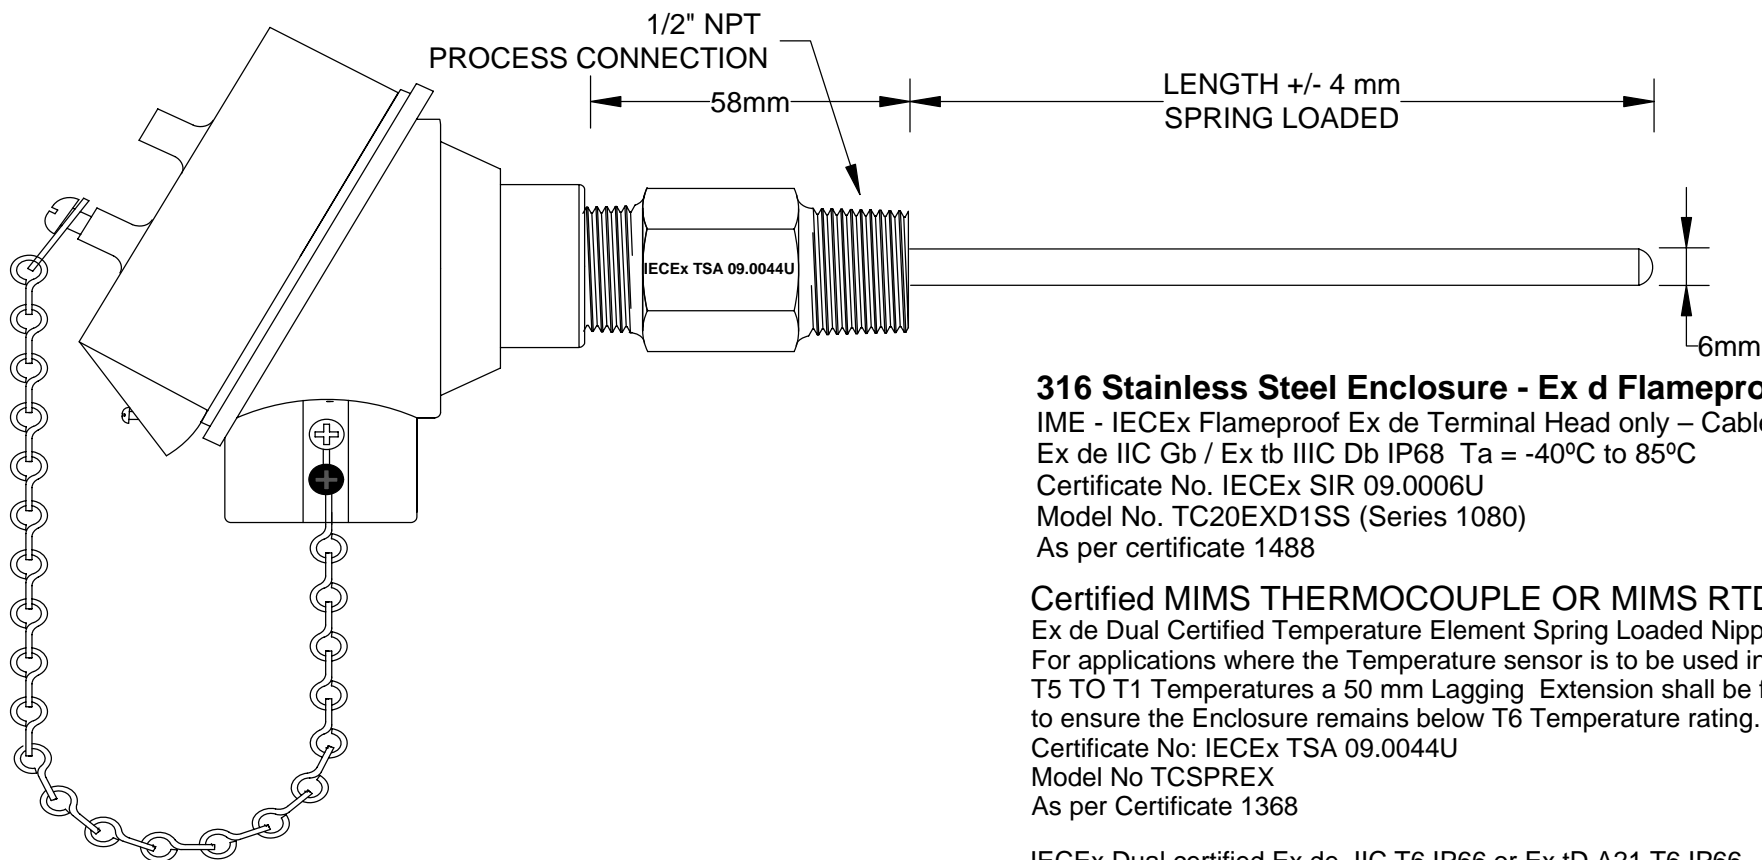

## 316 Stainless Steel Enclosure - Ex d Flameproof and DIP dust

IME - IECEX Flameproof Ex de Terminal Head only – Cable entry M20  
 Ex de IIC Gb / Ex tb IIIC Db IP68 Ta = -40°C to 85°C  
 Certificate No. IECEX SIR 09.0006U  
 Model No. TC20EXD1SS (Series 1080)  
 As per certificate 1488

**Certified MIMS THERMOCOUPLE OR MIMS RTD Sensor**  
 Ex de Dual Certified Temperature Element Spring Loaded Nipple Connection  
 For applications where the Temperature sensor is to be used in  
 T5 TO T1 Temperatures a 50 mm Lagging Extension shall be fitted  
 to ensure the Enclosure remains below T6 Temperature rating.  
 Certificate No: IECEX TSA 09.0044U  
 Model No TCSPREX  
 As per Certificate 1368

IECEX Dual certified Ex de IIC T6 IP66 or Ex tD A21 T6 IP66

IECEX Certificated of Conformance No : IECEX TSA 09.0044U  
 as a component

571

## TEMPERATURE CONTROLS PTY LTD

QUALITY ENDORSED COMPANY  
 Certificate No: QEC 14412  
 AS/NZS 9001:2008

### CONDITIONS

THIS DRAWING IS OUR  
 EXCLUSIVE PROPERTY  
 AND MUST NOT BE  
 COPIED OR HANDED  
 TO ANY OTHER PARTIES  
 WITH OUT WRITTEN  
 PERMISSION. IT SHALL  
 BE RETURNED UPON  
 REQUEST

SYDNEY: 7 YAMMA ST SEFTON , NSW 2162  
 PHONE: (02) 9721 8644 FAX : (02) 9738 9339  
 MELBOURNE: 8/280 Whitehall St YARRAVILLE, VIC 3013  
 PHONE: (03) 9687 0000 FAX : (03) 9687 1900  
 BRISBANE: 28A/125 Kerry Road, Archerfield Qld 4108  
 PHONE: 0418 222 868  
 EMAIL: sales@temperature.com.au

TITLE  
 IECEX TERMINAL HEAD C/W  
 Ex de / Ex tD SPRING LOADED ELEMENT

SIZE : A4	DATE : 27/11/13	<b>DWG NO : SD 730</b>
SCALE : NTS	DRAWING BY R.B	<b>REV : 04</b>