


Ex de / Ex tD Element Spring Loaded Nipple Connection with lagging extension nipple With 316 Stainless Steel Terminal Head

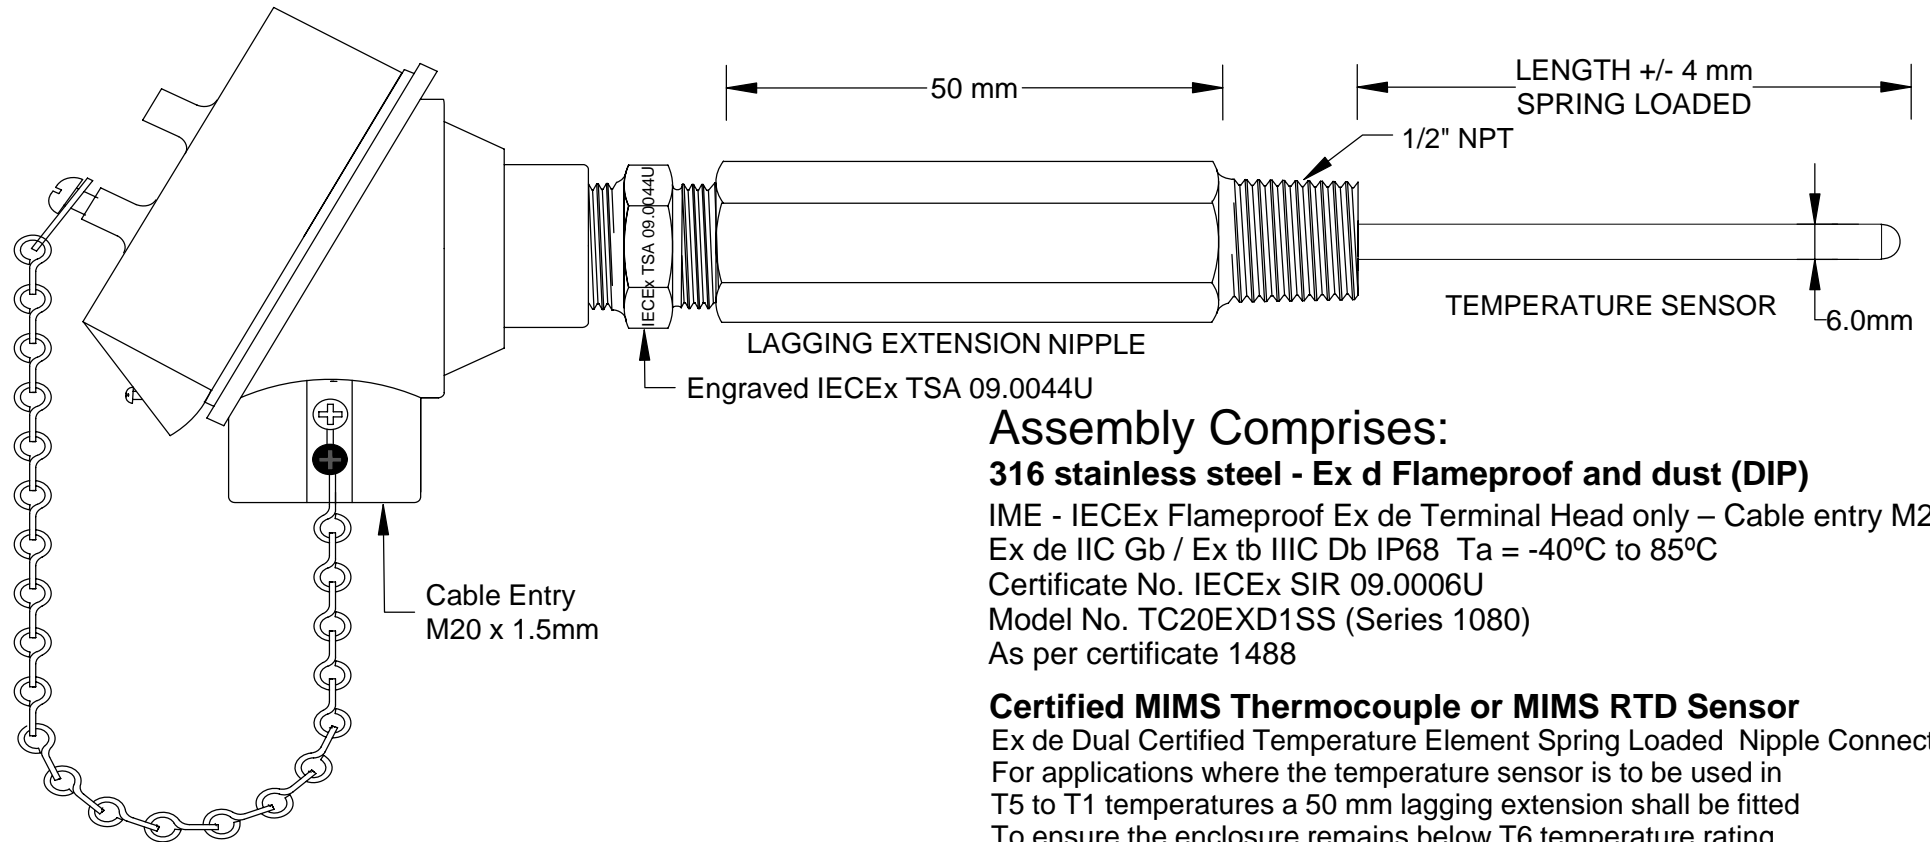

Assembly Comprises:

316 stainless steel - Ex d Flameproof and dust (DIP)

IME - IECEX Flameproof Ex de Terminal Head only – Cable entry M20

Ex de IIC Gb / Ex tb IIIC Db IP68 Ta = -40°C to 85°C

Certificate No. IECEX SIR 09.0006U

Model No. TC20EXD1SS (Series 1080)

As per certificate 1488

Certified MIMS Thermocouple or MIMS RTD Sensor

Ex de Dual Certified Temperature Element Spring Loaded Nipple Connection

For applications where the temperature sensor is to be used in

T5 to T1 temperatures a 50 mm lagging extension shall be fitted

To ensure the enclosure remains below T6 temperature rating.

Certificate No: IECEX TSA 09.0044U

Model No: TCSPREX

As per certificate SD 1368

638

IECEX Dual certified Ex de IIC T6 IP66 or Ex tD A21 T6 IP66

IECEX Certificated of Conformance No : IECEX TSA 09.0044U
as a component

TEMPERATURE CONTROLS PTY LTD

QUALITY ENDORSED COMPANY
Certificate No: QEC 14412
AS/NZS 9001:2008

CONDITIONS

THIS DRAWING IS OUR
EXCLUSIVE PROPERTY
AND MUST NOT BE
COPIED OR HANDED
TO ANY OTHER PARTIES
WITH OUT WRITTEN
PERMISSION. IT SHALL
BE RETURNED UPON
REQUEST

SYDNEY: 7 YAMMA ST SEFTON , NSW 2162
PHONE: (02) 9721 8644 FAX : (02) 9738 9339
MELBOURNE: 8/280 Whitehall St YARRAVILLE, VIC 3013
PHONE: (03) 9687 0000 FAX : (03) 9687 1900
BRISBANE: 28A/125 Kerry Road, Archerfield Qld 4108
PHONE: 0418 222 868
EMAIL: sales@temperature.com.au

TITLE
IECEX TERMINAL HEAD C/W
Ex de / Ex tD SPRING LOADED ELEMENT

SIZE : A4 DATE : 27/11/13 **DWG NO : SD 732**

SCALE : NTS DRAWING BY R.B **REV : 04**