


Ex e Certified Temperature Assembly Spring Loaded Nipple Connection

MODEL No: TC20SPRTA

ASSEMBLY SHOWN WITH OPTIONAL 3 PIECE UNION AND LAGGING EXTENSION

MATERIAL: ALUMINIUM ALLOY
DEGREE OF PROTECTION : IP66

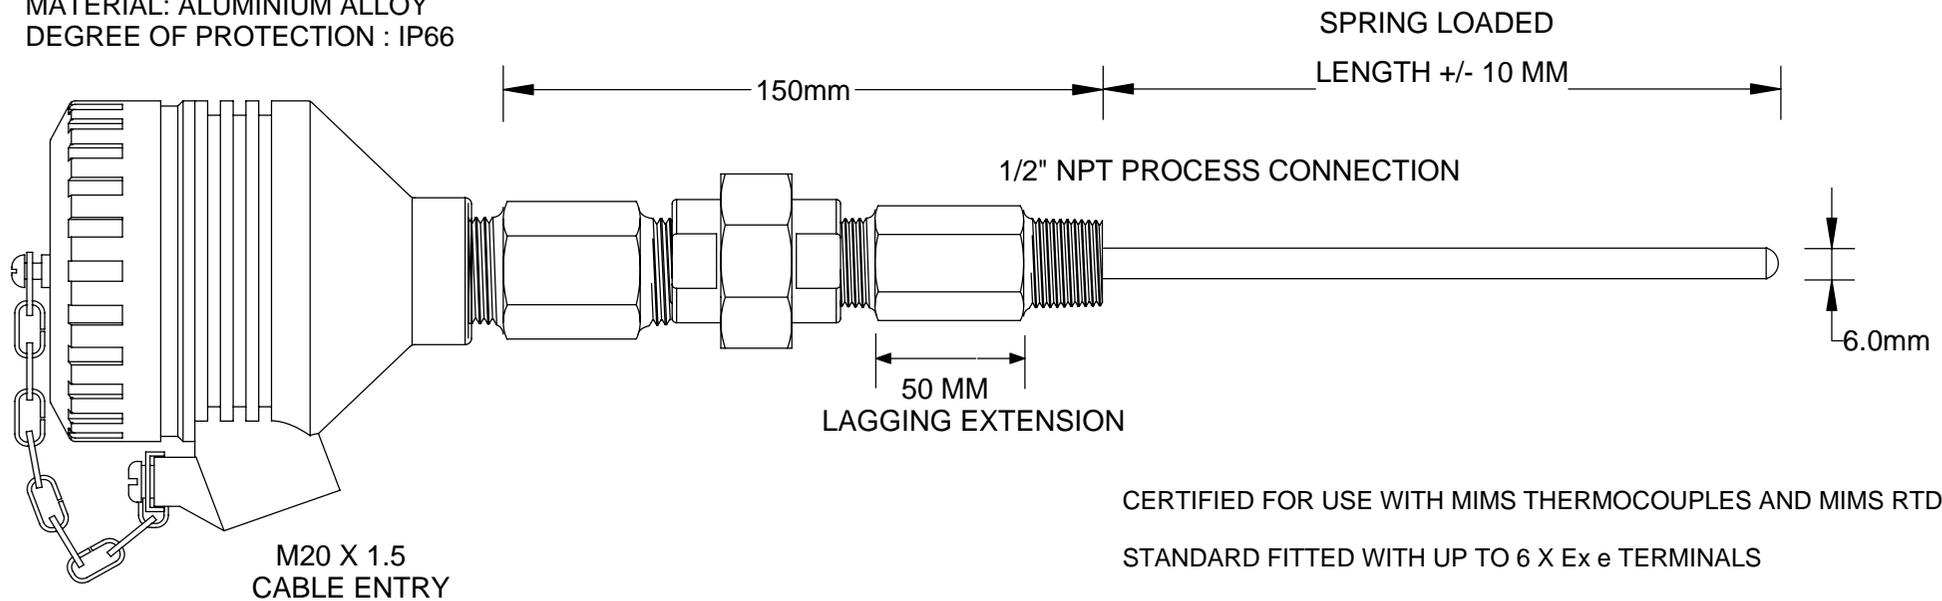

CERTIFIED FOR USE WITH MIMS THERMOCOUPLES AND MIMS RTD SENSORS

STANDARD FITTED WITH UP TO 6 X Ex e TERMINALS

MUST BE USED WITH A THERMOWELL TO MAINTAIN IP66 RATING

FOR APPLICATIONS WHERE THE TEMPERATURE SENSOR IS TO BE USED IN T5 TO T1 TEMPERATURES A 50 MM LAGGING EXTENSION SHALL BE FITTED TO ENSURE THE ENCLOSURE REMAINS BELOW T6 TEMPERATURE RATING.

IECEX certified Ex e IIC T6 IP66

IECEX Certificate of Conformance No : IECEX TSA 09.0045X
ISSUE 0 for complete assembly

TEMPERATURE CONTROLS PTY LTD		QUALITY ENDORSED COMPANY Certificate No: QEC 14412 AS/NZS 9001:2008	
<p>CONDITIONS</p> <p>THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST</p>	<p>SYDNEY: 7 YAMMA ST SEFTON , NSW 2162 PHONE: (02) 9721 8644 FAX : (02) 9738 9339 MELBOURNE: 8/280 Whitehall St YARRAVILLE, VIC 3013 PHONE: (03) 9687 0000 FAX : (03) 9687 1900 BRISBANE: 28A/125 Kerry Road, Archerfield Qld 4108 PHONE: (07) 3373 8424 FAX: (07) 3373 8067 EMAIL: sales@temperature.com.au</p>		
	<p>TITLE Ex e ASSEMBLY ALUMINIUM ENCLOSURE</p>		
	SIZE : A4	DATE : 01/07/15	DWG NO : SD 574
	SCALE : NTS	DRAWING BY R.B	REV : 05