


Ex de / Ex tD Certified Temperature Element Fixed Nipple Connection

MODEL No: TCFIXTA

Dual Certified Ex d Flameproof & Ex e Increased Safety

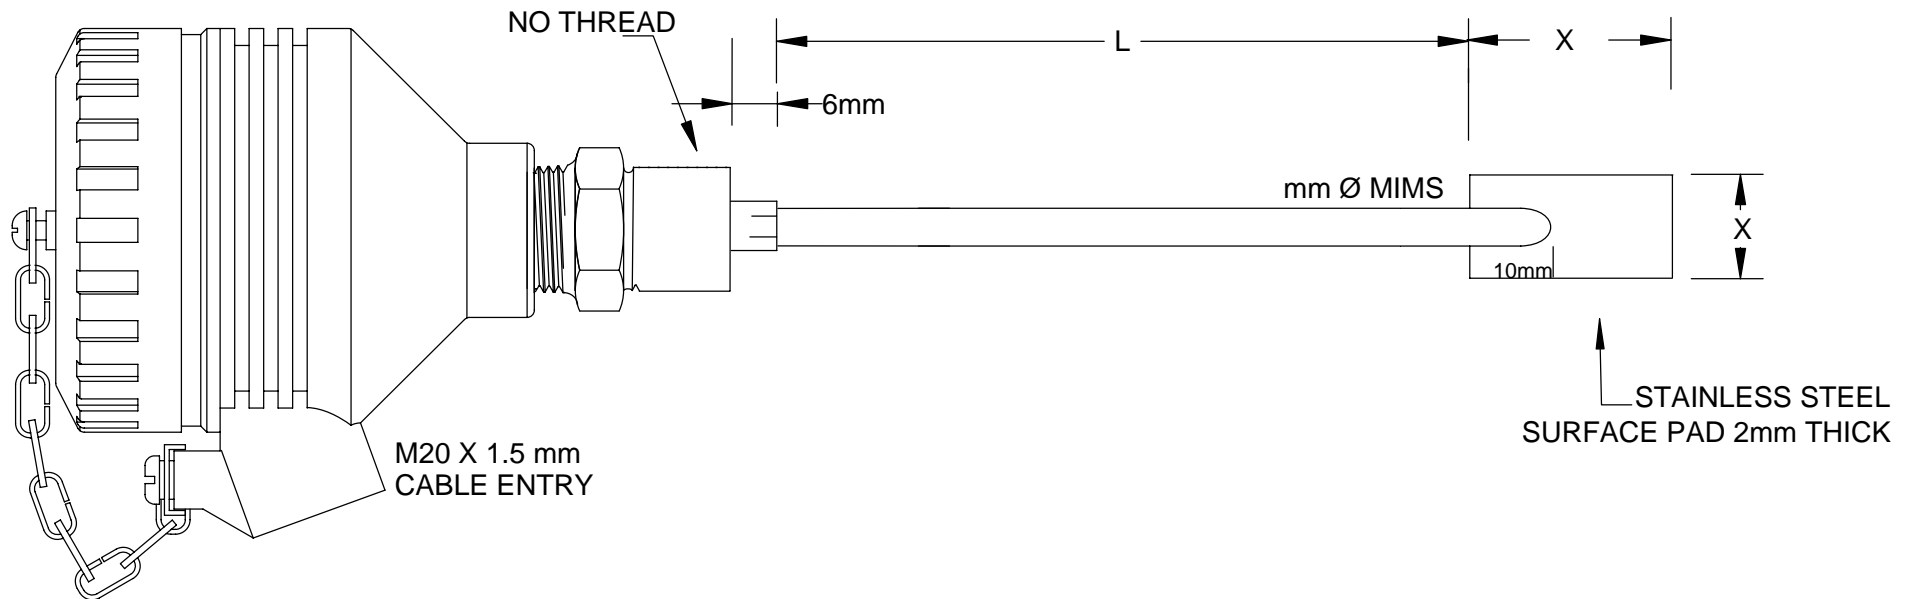

SUITABLE FOR USE WITH CERTIFIED Ex d / Ex e / Ex tD ENCLOSURE OR TRANSMITTER HOUSING WHICH HAS 1/2" NPT OR M20 X 1.5 MM PROCESS CONNECTION

CERTIFIED FOR USE WITH MIMS THERMOCOUPLES AND MIMS RTD SENSORS

FOR APPLICATIONS WHERE THE TEMPERATURE SENSOR IS TO BE USED IN T5 TO T1 TEMPERATURES A 50 MM LAGGING EXTENSION SHALL BE FITTED TO ENSURE THE ENCLOSURE REMAINS BELOW T6 TEMPERATURE RATING.

IECEX Dual certified Ex de IIC T6 IP66 or Ex tD A21 T6 IP66

IECEX Certificate of Conformance No : IECEX TSA 09.0045X

TEMPERATURE CONTROLS PTY LTD		QUALITY ENDORSED COMPANY Certificate No: QEC 14412 AS/NZS 9001:2008
CONDITIONS THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST	SYDNEY: 7 YAMMA ST SEFTON NSW 2162 PHONE: (02) 9721 8644 FAX: (02) 9738 9339 MELBOURNE: 8/280 WHITEHALL ST YARRAVILLE VIC 3013 PHONE: (03) 9687 0000 FAX: (03) 9687 1900 BRISBANE: 28A/125 KERRY RD ARCHERFIELD QLD 4108 PHONE: (07) 3373 8424 FAX: (07) 3373 8067 EMAIL: sales@temperature.com.au	
	TITLE Ex de / Ex tD ELEMENT	
SIZE : A4	DATE : 01/02/16	DWG NO : SD 858
SCALE : NTS	DRAWING BY R.B	REV : 02